

承认书

SPECIFICATION FOR APPROVAL

客 户：
CUSTOMER _____

品 名：
CUSTOMER _____

客户料号：
CUST P/N _____

产品料号：
PART NO RS3222-120M-SM

承认编号：
APPROVAL LH19223090702

版 次：
APPROVAL A.0

日 期：
ISSUED DATE 2023.09.07

承制方确认
Preproduction confirmed

客户确认
Customer confirm

拟 制 Artificial	
审 核 Audit	
批 准 Documents for approval	


--

承认后请回寄 Please send back after approved


变更记录表
SPECIFICATION RECORD

版本 VER	标记 TAG	数据 DATE	更改单号 CHANGE THE NOMBER	更改内容 NOTE	更改人 ISSUED BY	变更日期 ISSUED DATE
A.0				NEW DESIGN		2023.09.08

1. 安装尺寸
CONFIGURATION

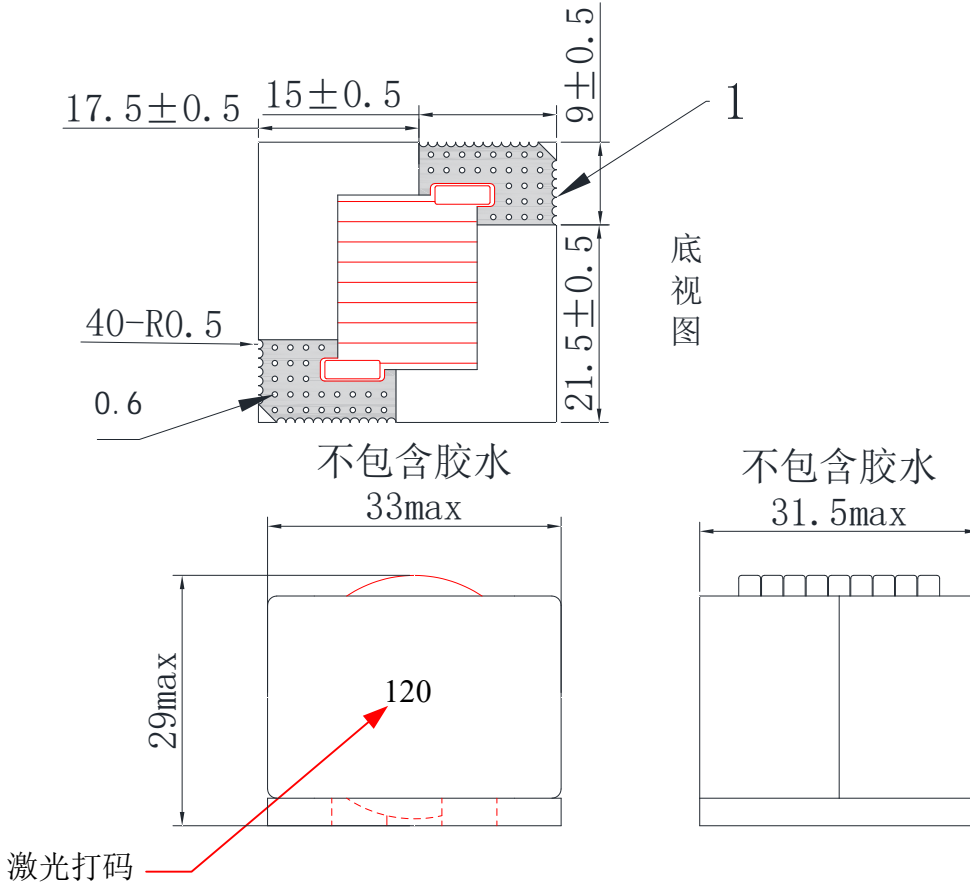


2. 电原理图
Electrical schematic diagram

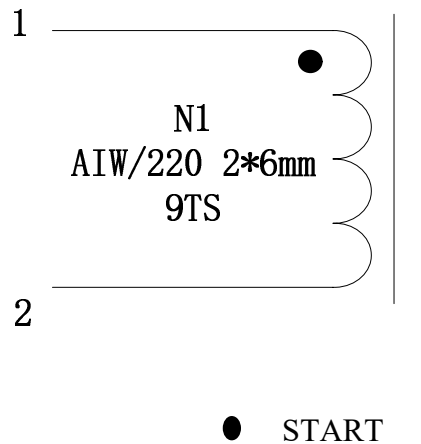

3. 绕线结构图

Winding structure diagram.

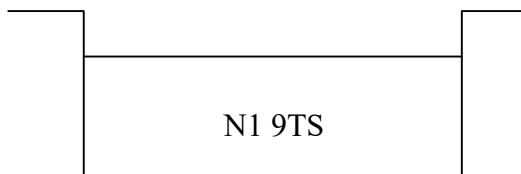

WINDING STEP							
WDG	Terminal	Wire Gauge	Turns (Ts)	Tape (Ts)	Tube		Remarks
					S	F	
N1	1-2	AIW/220 2*6mm	9TS	—	—	—	密绕

4. 电气参数 (@25°C)

ELECTRIC PARAMETER

NO.	测试参数 Measuring parameter	测量端 Measuring pin	测量值 Measuring value	测试标准 Measuring standard	测试仪器 Measuring Equipment
1	电感 Inductance	L ₁₋₂	12uh ± 20%	10kHz, 1Vrms、30Ω	TH2829AX
2	直流电阻 Dc resistance	R ₁₋₂	1 ≤ mΩ	20 ± 5°C	JS2511B
3	介质耐电压 HIGH-POT TEST	N1 TO CORE	DC500V 0.5mA 60S	No flying foxes, flashover or insulation breakdown.	TH2829AX
4	匝比 Turn Ratio	N1	9	10kHz, 1.0Vrms	CH1200

5. 外观要求

Cosmetic requirements

①产品应有合格证，包装应注明型号；

The product should be qualified, and the model should be indicated.

②外观整洁；

Look clean and tidy

③校正引脚符合尺寸要求；

The calibration pins conform to the size requirements.